



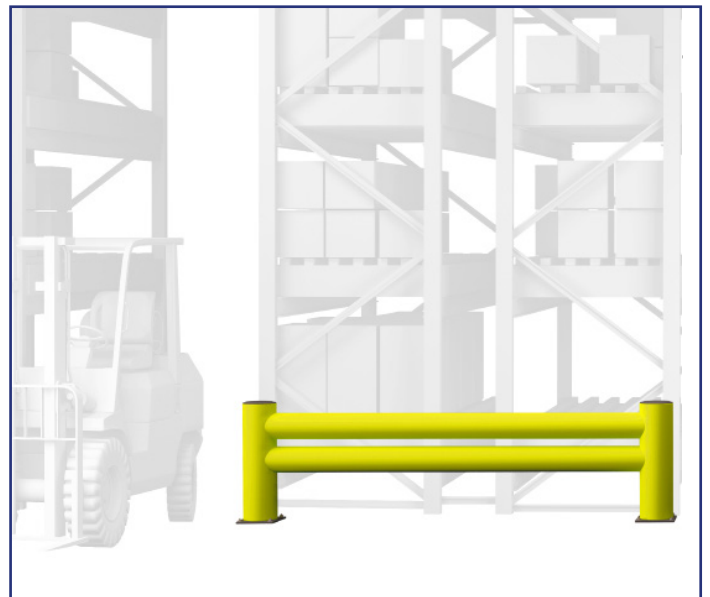

Technical Data Sheet

End of Aisle Double Rail Barrier

Solid protection and highly visible to MHE operators

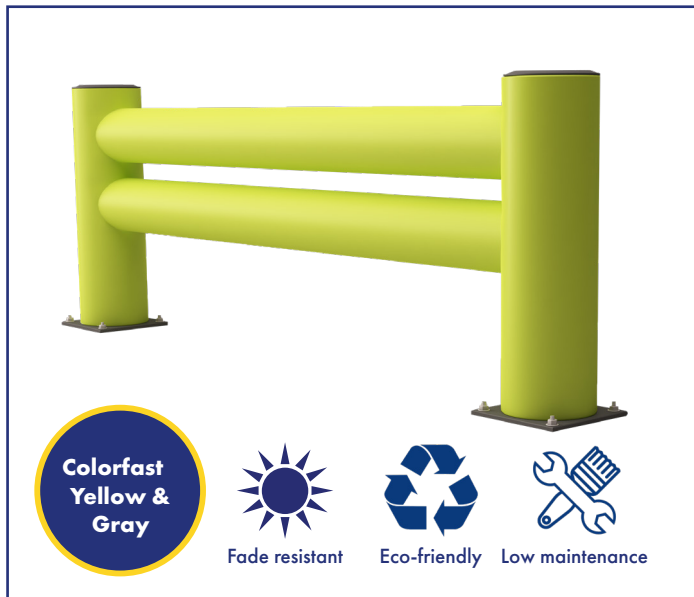

Features and Benefits

- Lower repairs and maintenance cost compared to metal barriers
- Reduces vehicle impact damage and downtime
- PAS 13 compliant and TÜV Nord accredited
- Greater employee safety and driver protection



Description

Easy to install, these low maintenance polymer barriers, don't rust, corrode, fade or require re-painting, and only need replacing after frequent, major impact has occurred.

The flexible barrier design, absorbs the load of impact, away from a vehicle and ground fixings to reduce damage and repair time, unlike metal barriers.

Available in a range of striking, high visibility colours that are easily detectable, preventing damage and accidents before they happen.

Fully recyclable, non-toxic and suitable for use in food production and freezer environments.

Property	Specification
Height	24.41"
Width	9.45" (footplate)
Length	35.43" upwards
Temperature Range	-40°F to 122°F
Color Options	Colorfast Yellow & Gray Hi-Vis Yellow & Blue Safety Yellow & Gray
Tested Impact Energy (J)	6,200
Deflection (inches)	7.09"